

Stress plate HTK-2G-M/TKE (collated)



Cross references

- DABO® TKR-4.8
- DABO® TKE-4.8
- DABO® TKR-4-4.8
- DABO® VHT-R-4.8
- DABO® VHT-E-4.8
- Stress plate HTK-2G 50



EJOT® installation tool ECOSET available as rental equipment.
Article number G000000072


Application range

- > To fix roofing membranes and insulating material to substructures made of sheet steel $\geq 0.70 \text{ mm} \leq 1.5 \text{ mm}$, timber or wood-based material
- > New buildings and renovations (observe layer design)
- > For the upright installation with ECOSET HTK installation tool
- > For special requirements of resistance to imposed loads
- > To reduce thermal bridges
- > For new buildings


Properties

- > Stress plate: high-grade plastic material
- > DABO® screw TKE = A4 stainless steel
- > Collated (25 pcs. per cartridge)
- > Telescope design for resistance to imposed loads
- > Combinations for total panel thicknesses up to 605 mm possible


HTK-2G-M/TKE-60-35/50

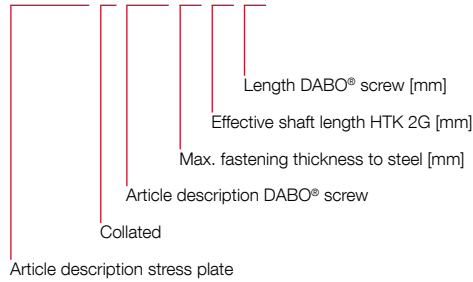

Applications



Technical specifications



Certifications



Conforms to the requirements according to VOB and the application class K2 according to DIN 18531 regarding the corrosion resistance

Product online



Order description	Total panel thickness [mm]	Effective Shaft length L [mm]	Screw length [mm]	PU [pieces]	Price/100 [EUR]	Article number	EAN
HTK-2G-M/TKE-80-55/50	80	55	50	1000		3705505022	4061245012193
HTK-2G-M/TKE-100-55/70	100	55	70	1000		3705507022	4061245012179
HTK-2G-M/TKE-120-95/50	120	95	50	1000		3709505022	4061245012155
HTK-2G-M/TKE-140-95/70	140	95	70	1000		3709507022	4061245012131
HTK-2G-M/TKE-160-115/70	160	115	70	700		3711507022	4061245012117
HTK-2G-M/TKE-180-145/60	180	145	60	700		3714506022	4061245012094
HTK-2G-M/TKE-200-145/80	200	145	80	700		3714508022	4061245012070
HTK-2G-M/TKE-220-145/100	220	145	100	700		3714510022	4061245012056
HTK-2G-M/TKE-240-145/120	240	145	120	700		3714512022	4061245012032

Order information: For timber substructures, screws need to be chosen 10 mm longer.